


## NT50AF

2" Flooring Cleat Nailer



### Features

- Accepts both T & L nails for maximum flexibility
- Mallet activated flooring nailer features a preferred seating system which provides accurate placement of nails at the appropriate angle and depth
- High capacity magazine reduces the frequency of nail re-loads

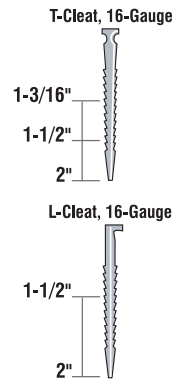

### Specifications

Nail Capacity	150
Nail Type	T or L Nails
Air Inlet	3/8"
Operating Pressure	70-90 psi
Weight	9.0 lbs

### Includes

Safety Glasses	875769
3/8" NPT Male Plug	190051
1/2" Shoe Pad	330387
3/4" Shoe Pad	330381
Non-Marring Hammer	330631
Wrench Set (4mm, 5mm, 6mm, Box)	330386
Carrying Case	330388

### Optional

Prefinished (Wide Profile) Shoe	330389
Nail Set for T and L Nails	330328


## NT50AGF

2" Oil-Less Flooring Cleat Nailer



### Features

- Mallet activated flooring nailer features a preferred seating system which provides accurate placement of staples at the appropriate angle and depth
- Oil-less design provides maintenance free operation
- Converts easily to a face nailer by simply changing the shoe
- Quick release gate allows for easy clearing of jammed fasteners without needing to remove the shoe for added convenience



### Specifications

Nail Capacity	175
Nail Type	T Nails
Air Inlet	3/8"
Operating Pressure	90-115 psi
Weight	13.0 lbs

### Includes

Safety Glasses	875769
3/8" NPT Male Plug	190051
Face Nailing Shoe	330438
Face Nailing Shoe Pad	330451
Non-Marring Hammer	330454
Wrench Set	330455
Grease	930035
Carrying Case	330456

### Optional

Shoe Base and Pad - 9/16" Flooring	330458
Shoe Base and Pad - 33/32" Flooring	330459
15-17mm Bamboo Flooring Shoe	330389
Nail Set for T and L Nails	330328


## NT50YF

2" Manual Cleat Nailer



### Features

- Mallet activated flooring nailer features a preferred seating system which provides accurate placement of staples at the appropriate angle and depth
- High strength aluminum housing reduces overall weight and adds durability
- Non-marking accessory shoe prevents damage to the floor
- Ratcheting ram guarantees nails are set



### Specifications

Nail Capacity	150
Nail Type	T Nails
Air Inlet	N/A
Operating Pressure	N/A
Weight	7.6 lbs

### Includes

Safety Glasses	875769
Non-Marring Hammer	330319
Extension Handle	330278
Service Parts Kit	330324
Carrying Case	330325

### Optional

Thin Flooring Shoe (3/8"-9/16")	330318
Face Nailing Shoe	330317
3/8"-3/4" Bamboo Flooring Shoe	330327
Nail Set for T and L Nails	330328
Shim Pack	330629

### Specifications

Power Output	1.3 Run/1.9 Peak HP
Tank Capacity	4 Gallon
Amps	13
Motor RPM	3,450 RPM
Max Pressure	135 PSI
CFM	3.0 @ 90 PSI
Weight	57.7 lbs

### Includes

Quick Connect Coupler	885447
Synthetic Oil (SAE5W50 8oz)	19210B
Oil Dipstick	881469

### Specifications

Power Output	1.5 Run/2.0 Peak HP
Tank Capacity	4 Gallon
Amps	14.5
Motor RPM	3,450 RPM
Max Pressure	135 PSI
CFM	4.0 @ 90 PSI
Weight	60 lbs

### Includes

Pressure Gauge	881508
Synthetic Oil (SAE5W50 8oz)	19210B
Oil Dipstick	881469

### Specifications

Power Output	1.6 Run/2.5 Peak HP
Tank Capacity	4 Gallon
Amps	15
Motor RPM	3,450 RPM
Max Pressure	135 PSI
CFM	4.4 @ 90 PSI
Weight	63.7 lbs

### Includes

Industrial Couplers (X 2)	191171
Synthetic Oil (SAE5W50 8oz)	19210B
Oil Dipstick	881469

### Specifications

Power Output	1.5 Run HP
Tank Capacity	.8 Gallon
Amps	13.2
Motor RPM	730 RPM
Max Pressure	125 PSI
CFM	6.6 @ 90 PSI
Weight	172 lbs

### Includes

Synthetic Oil (SAE5W50 8oz)	19210B
Oil Dipstick	724119

### Features

- Direct drive electric motor provides durability and long life
- Overload protection with manual reset
- Line regulator with gauge for immediate use at worksite
- Oil lubricated pump improves efficiency and ensures smooth use

### Features

- Direct drive electric motor provides durability and long life
- Line regulator with gauge for immediate use at worksite
- Oil lubricated pump improves efficiency and ensures smooth use
- All metal inner construction and fan to withstand rugged use

### Features

- Oil lubricated pump utilizes oversized bearings for quiet and dependable service
- Locking regulator and 105 on/135 off psi means no worries about pressure wander or pressure starved tools on the job
- Custom integrated control panel protects the gauge, regulator and plumbing, while centralizing controls for ease of use

### Features

- Oil lubricated pump utilizes oversized bearings for quiet and dependable service
- Locking regulator and 105 on/135 off psi means no worries about pressure wander or pressure starved tools on the job
- Custom integrated control panel protects the gauge, regulator and plumbing, while centralizing controls for ease of use

## EC89

Portable 4 Gallon Twin Stack Air Compressor



## EC12

Portable 4 Gallon Twin Stack Air Compressor



## EC119SA

Portable 4 Gallon Twin Stack Air Compressor



## EC189

8 Gallon Electric Wheeled Air Compressor



## EC2510E

8 Gallon Gas Powered Wheeled Air Compressor



### Features

- Powered by a professional grade Honda GX engine
- Solid cast iron cylinder provides industry recognized premium material for long life, consistent compression and low oil carryover
- Oversized oil level site glass allows everyone to monitor the oil level for the pump avoiding pump damage due to lock up from inadequate oil supply

\* The power rating of the engine indicated in this document is the net power output tested on a production engine for the engine model and measured in accordance with SAE J1349 at a specified rpm. Mass production engines may vary from this value. Actual power output for the engine installed in the final machine will vary depending on numerous factors, including the operating speed of the engine in application, environmental conditions, maintenance, and other variables.

## EC25E

8 Gallon Gas Powered Wheeled Air Compressor



### Features

- Powered by a professional grade Honda GX engine
- Cast iron pump with oil splash lubrication and ball bearing mounted crank shaft for durability
- 10" fly cooling wheel, coupled with a shroud to direct air over compressor coils, allows continuous use without the threat of overheating
- Belt drive lowers pump RPM for longer life

\* The power rating of the engine indicated in this document is the net power output tested on a production engine for the engine model and measured in accordance with SAE J1349 at a specified rpm. Mass production engines may vary from this value. Actual power output for the engine installed in the final machine will vary depending on numerous factors, including the operating speed of the engine in application, environmental conditions, maintenance, and other variables.

## EC1110

5-Gallon Wheelbarrow Air Compressor



### Features

- Solid rubber wheel
- Two air outlets
- Retractable handles
- Integrated control panel
- Easy to start at low voltage supply

### Specifications

Power Output	5.5 Net HP* @ 3,600 RPM
Tank Capacity	8 Gallon
Displacement	.196 cc
Motor RPM	3,200 RPM
Max Pressure	145 PSI
CFM	9.3 @ 90 PSI
Weight	144 lbs

### Includes

Synthetic Oil (SAE5W50 8oz)	19210B
Breather Pipe Plug	885483
Wheel	885423
Pressure Gauge	885446
Drive Belt	885444
Filter	881553

### Specifications

Power Output	6.5 Net HP* @ 3,600 RPM
Tank Capacity	8 Gallon
Displacement	.196 cc
Motor RPM	1,380 RPM
Max Pressure	125 PSI
CFM	9.6 @ 90 PSI
Weight	170 lbs

### Includes

Synthetic Oil (SAE5W50 8oz)	19210B
Oil Dipstick	724119
Intake Filter	724044
Wheel	724005
Pressure Gauge	724088
Drive Belt	724050
Regulator	724065

### Specifications

Power Output	1.6 Run HP
Tank Capacity	.5 Gallon
Amps	.15
Motor RPM	3,450 RPM
Max Pressure	145 PSI
CFM	4.2 @ 90 PSI
Weight	83 lbs

### Includes

Synthetic Oil (SAE5W50 8oz)	19210B
Oil Dipstick	881460

Item Code	Description	M's Box	M's Ctn.	Ctns/Skid	Wt/lbs/Skid	Item Code	Description	M's Box	M's Ctn.	Ctns/Skid	Wt/lbs/Skid
<b>NR83A, NR83A2, NR90AC, NR90AC2, NR90AC3, NR90GR, NR90GR2, NR90AE</b>											
Full Round Head Brite Basic Plastic Strip Framing Nails											
10100	2" x .113 SM	6	48		1810	10199	2-1/4" x .120 SM	5	48		1950
10122	2" x .113 RG	6	48		1810	10198	2-1/4" x .120 SC	5	48		1950
10102	2-3/8" x .113 SM	5	48		1860	<b>NR83A, NR83A2, NR83A2(S), NR90AC, NR90AC2, NR90AC3, NR90GR, NR90GR2, NR90AE</b>					
10102M	2-3/8" x .113 SM BS FRH	2	48		1860	Full Round Electro Galvanized Plastic Strip Ballistic Fasteners					
10103	2-3/8" x .113 RG	5	48		1860	17640	8 x 1-3/4" Threaded SC EG	1	4	48	1235
10103M	2-3/8" x .113 RG BS FRH	2	48		1860	17641	8 x 2" Threaded SC EG	1	4	48	1430
10203	2-3/8" x .113 SC	5	48		1860	17644	8 x 2-1/4" Threaded SC EG	1	4	48	1530
10105	3" x .120 SM	4	48		2005	17642	8 x 2-1/2" Threaded SC EG	1	4	48	1715
10133	3" x .120 RG	4	48		2005	17643	8 x 2-3/4" Threaded SC EG	1	4	48	1910
10124	3" x .120 SC	4	48		2195	17645	8 x 3" Threaded SC EG	1	4	48	2005
10107	3-1/4" x .120 SM	4	48		2435	<b>N3804AB, N3804AB2, N3804AB3</b>					
10132	2-1/2" x .131 SM	5	48		2435	18 Gauge Electro Galvanized Finish Staples					
10132M	2-1/2" x .131 SM BS FRH	2	48		2435	11099S	1/4" x 1/2" - 18 GA EG	5	50	69	
10131	2-1/2" x .131 RG	5	48		2340	11100S	1/4" x 5/8" 18 GA EG	5	50	60	
10110	3" x .131 SM	4	48		2340	11101S	1/4" x 3/4" - 18 GA EG	5	30	84	
10110M	3" x .131 SM BS FRH	2	28		2340	11102S	1/4" x 7/8" - 18 GA EG	5	50	44	
10186	3" x .131 RG	4	48		2535	11103S	1/4" x 1" - 18 GA EG	5	30	69	
10111	3-1/4" x .131 SM	4	48		2535	21103S	1/4" x 1" - 18 GA EG	1	10	150	
10111M	3-1/4" x .131 SM BS FRH	2	48		2535	11104S	1/4" x 1-1/8" - 18 GA EG	5	30	60	
10109	3-1/4" x .131 SC	4	48		2580	11105S	1/4" x 1-1/4" - 18 GA EG	5	50	36	
10120	3-1/2" x .131 SM	4	48		2100	11107S	1/4" x 1-1/2" - 18 GA EG	5	30	48	
10000	1-1/2" x .148 SM	5	48		2970	<b>N5008AA, N5008AB, N5008AC, N5008AC2</b>					
10143M	2-3/8" x .148 SM BS FRH	2	48		3110	16 Gauge Standard Crown Staples					
10136	3" x .148 SM	4	48			11200	7/16" x 1"	10	60	1115	
10138M	3-1/4" x .148 SM BS FRH	2	48			11201	7/16" x 1-1/4"	10	60	1386	
10140	3-1/2" x .162 SM	3	48			11203	7/16" x 1-1/2"	10	60	1655	
<b>NR83A, NR83A2, NR90AC, NR90AC2, NR90AC3, NR90GR, NR90GR2, NR90AE</b>											
Full Round Head Electro Galvanized Plastic Strip Framing Nails											
10123	2" x .113 RG	6	48		1810	11204	7/16" x 1-5/8"	10	60	1835	
10104	2-3/8" x .113 SM	5	48		1860	11205	7/16" x 1-3/4"	10	60	2015	
10112	2-3/8" x .113 RG	5	48		1860	11206	7/16" x 2"	10	60	2075	
10113	3" x .120 SM	4	48		2005	<b>N3824A, N5024A, N5024A2</b>					
10117	3" x .120 RG	4	48		2005	16 Gauge Roofing Staples					
10106	3" x .120 SC	4	48		2005	11300	1" x 5/8"	10	60	1086	
10114	3-1/4" x .120 SM	4	48		2195	11301	1" x 7/8"	10	60	1235	
10119	3-1/4" x .120 SC	4	48		2195	11305	1" x 3/4"	10	60	1175	
10155	2-1/2" x .131 SM	5	48		2435	11302	1" x 1"	10	60	1355	
10115	3" x .131 SM	4	48		2340	11303	1" x 1-1/4"	10	60	1655	
10116	3-1/4" x .131 SM	4	48		2535	11304	1" x 1-1/2"	10	60	1895	
<b>NR83A, NR83A2, NR90AC, NR90AC2, NR90AC3, NR90GR, NR90GR2, NR90AE</b>											
Full Round Head Hot Dipped Galvanized Plastic Strip Framing Nails											
10171M	2" x .113 RG HDG FRH	2	48			<b>OTHER BRANDS</b>					
10159	2-3/8" x .113 SC DP HDG-FRH	5	48			Medium Crown and Wide Crown Staples					
10160	2-3/8" x .113 SM HDG FRH	5	48			11403	1" x 1-1/4" 16 GA GS Paslode Style	10	60	1690	
10161	2-3/8" x .113 RG HDG FRH	5	48			11404	1" x 1-1/2" 16 GA GS Paslode Style	10	60	1835	
10161M	2-3/8" x .113 RG HDG FRH	2	48			11506	1/2" x 1-1/4" 16 GA GS Paslode Style	10	60	1355	
20161S	2-3/8" x .113 RG HDG FRH	1	4			11504	1/2" x 1-1/2" 16 GA GS Paslode Style	10	60	1655	
10162	3" x .131 SM HDG FRH	4	48			11507	1/2" x 1-3/4" 16 GA GS Paslode Style	10	60	1835	
10162M	3" x .131 SM HDG FRH	2	48			11601	1/2" x 1-1/2" Bostitch Style	10	60	1595	
10163	3-1/4" x .131 SM HDG FRH	4	48			11602	1/2" x 1-3/4" Bostitch Style	10	60	1835	
10163M	3-1/4" x .131 SM HDG FRH	2	48			<b>NV45AB, NV45AB2, NV45AB2S, NV45AC, NV45AE, NV45AES</b>					
10164	3-1/2" x .131 SM HDG FRH	4	48			Wire Coil Electro Galvanized Roofing Nails					
10165	3" x .120 SC DP HDG FRH	4	48			12100	1" x .120 SM	7.2	48	1335	
10165M	3" x .120 SC DP HDG FRH	2	48			12101	1-1/4" x .120 SM	7.2	48	1575	
10166	3-1/4" x .120 SC DP HDG FRH	2	48			12102	1-1/2" x .120 SM	7.2	40	1515	
10168	2-1/2" x .131 SM HDG FRH	4	48			12103	1-3/4" x .120 SM	7.2	40	1755	
10300	3" x .120 SM HDG FRH	4	48			<b>NV45AB, NV45AB2, NV45AB2S, NV45AC, NV45AE, NV45AES</b>					
10301	2-1/4" x .148 SM HDG FRH	4	48			Wire Coil Stainless Steel Roofing Nails					
10302	3" x .120 RG HDG FRH	4	48			12120	1-1/4" x .120 SM 304 SS	7.2	48	1650	
10302M	3" x .120 RG HDG FRH	2	48			<b>NV83A, NV83A2, NV65AC</b>					
20302S	3" x .120 RG HDG FRH	1	4			Full Round Head Brite Basic Wire Coil Framing Nails					
10303	3-1/2" x .162 SM HDG FRH	3	48			12200	2" x .099 SM	9	40	1835	
10305	3-1/4" x .148 SM HDG FRH	3	48			12201	2" x .099 RG	9	40	1835	
10306	3-1/4" x .131 SC HDG FRH	4	48			12205	2" x .099 SC BL CHS	9	40	1835	
10307	2-3/8" x .148 SM HDG FRH	4	48			12206	2-1/4" x .099 SC BL CHS	9	40	1955	
10308	3" x .131 SM 304 SS FRH	4	48			12219	2-3/8" x .099 RG	9	40	2005	
10309	3-1/4" x .120 RG HDG FRH	4	48			12218	2-1/2" x .099 SC BL CHS	9	40	2075	
10309M	3-1/4" x .120 RG HDG FRH	2	48			12203	2" x .113 SM	5	56	1775	
<b>NR83A, NR83A2, NR90AC, NR90AC2, NR90AC3, NR90GR, NR90GR2, NR90AE</b>											
Full Round Head 304 Stainless Steel Plastic Strip Framing Nails											
10150	2-3/8" x .113 RG 304 SS	1	5	48	1860	12226	2" x .113 RG	5	56	1775	
10152	3" x .131 RG 304 SS	1	4	48	2340	12221	2-3/8" x .113 SM	5	48	1860	
10153	3-1/4" x .120 RG 304 SS	1	4	48	2195	12211	2-3/8" x .113 RG	5	48	1860	
<b>NR83A, NR83A2, NR90AC, NR90AC2, NR90AC3, NR90GR, NR90GR2, NR90AE</b>											
Full Round Head 316 Stainless Steel Plastic Strip Framing Nails											
10250	2-3/8" x .113 RG 316 SS	1	5	48	1860	12213	3" x .120 SM	4	45	1925	
10253	3-1/4" x .120 RG 316 SS	1	4	48	2195	12231	3" x .120 SC	4	45	1925	
<b>NR83A, NR83A2, NR90AC, NR90AC2, NR90AC3, NR90GR, NR90GR2, NR90AE</b>											
Full Round Head Hot Dipped Galvanized Plastic Strip Hardi Nails											
10172	2-5/8" x .113 SM	5	48		1960	12215	3-1/4" x .120 SM	4	45	2000	
10174	2-1/2" x .113 SM	5	48		2100	12214	3-1/4" x .120 SC	4	45	2000	
10173	3" x .120 SM	4	48		2195	12236	2-1/2" x .131 SM	4.5	48	2000	