


The holding power of screws—the productivity of a nail gun.



**Trim-head self-drilling,
2/3 coarse-thread screw**
#1 square drive
Type 17 point
W72 Magni 599 coating, waxed
THCH8212 #8 x 2-1/2"

For composite decking. Trim head minimizes “volcano” swelling around hole. 2/3 thread ensures tight connection: screw spins if thread doesn’t have solid bite in joist. Type 17 point eliminates predrilling. Includes one #1 square bit per box.

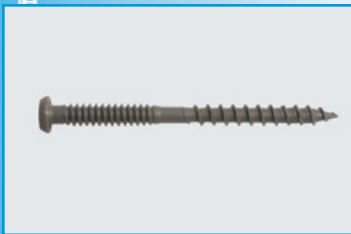

Composite Deck Screw
#2 square drive
Dual thread design
Tan, Grey or Red Magni 599 coated and
Stainless Steel available, waxed
CD10212G #10 x 2-1/2"
CD10212T #10 x 2-1/2"
CD10212R #10 x 2-1/2"
CD10212S #10 x 2-1/2"

For composite decking. Special design eliminates mushrooming and ensures a clean, flush finish.

CD10300G #10 x 3"
CD10300T #10 x 3"
CD10300R #10 x 3"
CD10300S #10 x 3"

Additional screws available upon request



The PAM auto-feed screw system offers high productivity for every application:

- High quality, contractor tough
- 50 screws per strip
- Reversible belt—faster reloads
- Positive advance with any screw size, 5/8" to 3"
- Positive-placement, open-nose design aids screw placement
- Saves time
- Improves quality
- Reduces callbacks
- Reduces operator fatigue
- Protects your reputation

Pamfast screws fit: Hilti, Makita, Grabber, Senco, and Milwaukee tools.

W72 Magni 599 is an acid-resistant, pore-sealing agent chosen to resist corrosive elements.

- Resistant up to 1,500 hours of Salt Spray Test ASTM B-117
- Resistant up to 20 cycles of Acid Rain Test DIN 50018, SFW 2.0L

PAMFAST composite decking screws are designed for use with products such as:

- Trex[®]
- ChoiceDeck[®]
- Weatherbest[®]
- Nexwood[®]
- Epoch[®]