



# TrapEase<sup>®</sup>

## COMPOSITE DECK SCREW

### NO MORE MUSHROOMS!

Specially designed to eliminate the mushrooming effect caused by standard deck screws in composite deck materials.

- Oversized top thread traps most loose composite material during installation
- Concave underside of head seals surface for clean appearance
- Bottom thread and point are designed for maximum pull-down power
- Deep #2 square drive provides the best bit engagement, reducing cam-out
- Guaranteed corrosion resistant coating. ACQ approved

Photographs should not be used as a reference for fastening patterns.



### NO MORE MUSHROOMS!



STANDARD DECK SCREW



TRAPEASE

For more information or free samples, call FastenMaster at 800-518-3569.

# TrapEase®

## COMPOSITE DECK SCREW

### INSTALLATION PROCEDURE


- Use a 0-1800 RPM variable speed corded or 18V cordless non-impact drill. Install fastener in a continuous drive until head is slightly below flush.
- Install two screws at every joist.
- When fastening within 1½" from the end of a board, follow the standard building practice of predrilling a ⅛" diameter pilot hole. This will prevent the board from splitting.
- Install screws no closer than ¾" from edge of board.
- Do not use TrapEase when attaching composites over "fixed" surfaces: sleeper systems, roof decks, solid wood surfaces (i.e. fascia, handrails) or metal joists.
- TrapEase Stainless Steel screws are recommended in these fixed surface conditions or when decking is being applied over restricted airspace (less than 12" of clearance below the joists on 3 sides).
- For solid wood decking, consult our website for the proper screw.

For technical assistance or questions regarding proper use of this fastener, please contact FastenMaster Technical Support at 800-518-3569 or visit [www.FastenMaster.com](http://www.FastenMaster.com).

### GUARANTEED CORROSION RESISTANCE

TrapEase is guaranteed not to rust or streak in composite decking for the life of the project when installed correctly. The fastener has also been tested and approved for fastening composite decking to ACQ and CA-B. A guarantee regarding this can be found on [www.FastenMaster.com](http://www.FastenMaster.com). Use TrapEase Stainless Steel Composite Deck Screws when application is within 1,000 feet of saltwater or when de-icing salts will be in contact with decking.

### PRODUCT FEATURES

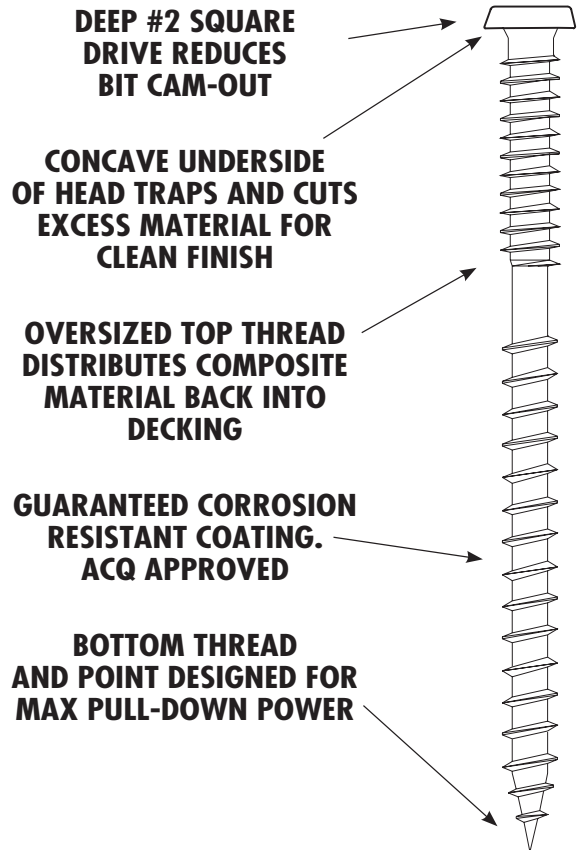

Item #	Color	Screw Length	Quantity per Box	Sq. Ft. of Deck Surface
FMTR9212-350GY	Gray	2½"	350	100
FMTR9212-1750GY	Gray	2½"	1750	500
FMTR9212-350BR	Brown	2½"	350	100
FMTR9212-1750BR	Brown	2½"	1750	500
FMTR9212-350DR	Redwood	2½"	350	100
FMTR9212-1750DR	Redwood	2½"	1750	500
FMTR9212-350DB	Dark Brown	2½"	350	100
FMTR9212-1750DB	Dark Brown	2½"	1750	500

Item #	Color	Screw Length	Quantity per Box	Sq. Ft. of Deck Surface
FMTR9003-350GY	Gray	3"	350	100
FMTR9003-1750GY	Gray	3"	1750	500
FMTR9003-350BR	Brown	3"	350	100
FMTR9003-1750BR	Brown	3"	1750	500
FMTR9003-350DR	Redwood	3"	350	100
FMTR9003-1750DR	Redwood	3"	1750	500
FMTR9003-350DB	Dark Brown	3"	350	100
FMTR9003-1750DB	Dark Brown	3"	1750	500

FMTRSHET 0510

\*Based on a fastening pattern of 2 screws per joist, spaced every 16", into standard 6" wide decking