



TrussLok[®]

ENGINEERED WOOD FASTENER

No Predrilling. They ZIP right in! Engineered for multi-ply LVL, LSL and PSL applications.

- Faster and easier than through bolts
- IBC/IRC code compliant. ESR #1078
- Approved for single-sided installation up to 4 plies
- Higher side load capacity with fewer fasteners saves time and labor
- Prevents gapping between plies which can occur in nailed applications
- Winged point, modified thread design and anti-friction coating significantly reduces installation torque
- Specified by Trus Joist[®], Boise[®], GP[®] and other leading wood manufacturers
- Hex driver bit included

Photograph should not be used as a reference for fastening patterns.



For more information or free samples, call FastenMaster at 800-518-3569.


TrussLok®

ENGINEERED WOOD FASTENER

INSTALLATION PROCEDURE

- Install using a ½" corded or 18 volt cordless drill.
- Bring underside of washer head flush with wood surface. Do not countersink.
- Choose correct TrussLok length. See below.
- Always refer to engineered wood manufacturer's literature for proper fastening pattern, design load information and additional fastener installation requirements.
- Maintain a minimum distance of 2" from any edge and 4" from end of beam.

SUGGESTED TRUSSLOK APPLICATIONS

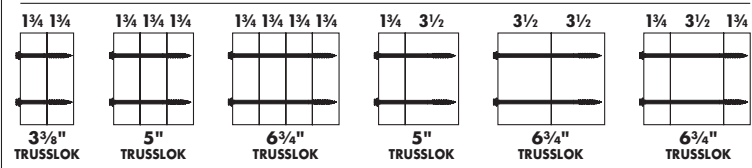

A design professional should be consulted when making critical connections to ensure the proper number and location of all fasteners meet national and local code requirements.

For complete design values and engineering data, available through ICC-ES, see report ESR #1078 at www.icc-es.org.

For technical assistance or questions regarding proper use of this fastener, please contact FastenMaster Technical Support at 800-518-3569 or visit www.FastenMaster.com.


PRODUCT FEATURES

BUILT UP "CHAMFER" UNDER HEAD FOR ADDED STRENGTH

EPOXY COATED WITH ANTI-FRICTION TOP COAT. CORROSION RESISTANT WITHOUT RISK OF HYDROGEN EMBRITTLEMENT

CORRECT THREAD LENGTH. DRAWS PLYS TOGETHER WITHOUT "BOARD JACKING"

WINGED POINT REDUCES INSTALLATION TORQUE AND ELIMINATES SPLITTING

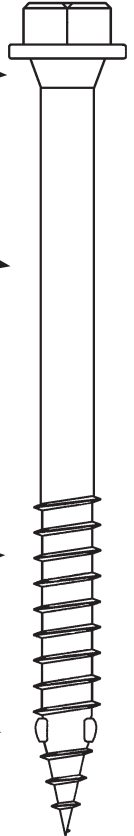

FMTLSHEET (0510)

Item #	Quantity per Box	Screw Length	Threading
FMTSL338-50	50	3 3/8"	1 1/2"
FMTSL005-50	50	5"	1 1/2"
FMTSL634-50	50	6 3/4"	1 1/2"
FMTSL338B-250	250	3 3/8"	1 1/2"
FMTSL005B-250	250	5"	1 1/2"
FMTSL634B-250	250	6 3/4"	1 1/2"